

# A BUILDING PANEL HAS MEMBERS CONNECTED TOGETHER TO FORM A STRESSED FRAME, WITH A CASTABLE SUBSTANCE IN THE INTERIOR OF THE PANEL

**Publication number:** NZ259493

**Publication date:** 1997-10-24

**Inventor:** ABOU-RACHED ROGER GEORGES (CA)

**Applicant:** R A R CONSULTANTS LTD (CA)

**Classification:**

**- International:** E02D27/01; B28B11/04; B28B23/00; E02D27/02; E02D27/24; E02D27/34; E04B1/04; E04B1/24; E04B1/343; E04B1/348; E04B1/98; E04C1/00; E04C2/04; E04C2/06; E04C2/26; E04C2/38; E04F13/02; E04F13/08; E04F13/14; E04F13/21; E04H1/02; E04H9/02; E02D27/01; B28B11/04; B28B23/00; E02D27/00; E02D27/02; E02D27/34; E04B1/02; E04B1/24; E04B1/343; E04B1/348; E04B1/98; E04C1/00; E04C2/04; E04C2/06; E04C2/26; E04C2/38; E04F13/02; E04F13/08; E04F13/14; E04F13/21; E04H1/02; E04H9/02; (IPC1-7): E04B1/98; E02D27/02; E02D27/34; E04C2/38; E04H9/02

**- European:** B28B11/04; B28B23/00W; E02D27/34; E04B1/04; E04B1/24; E04B1/343C1; E04C2/06; E04C2/38C; E04F13/08Q; E04F13/14F; E04H9/02

**Application number:** NZ19940259493 19940107

**Priority number(s):** WO1994CA00010 19940107; US19930169891 19931220

**Also published as:**

WO9517560 (A1)  
EP0736124 (A1)  
US5862639 (A1)  
US5584151 (A1)  
SI9420070 (A)


more >>

[Report a data error here](#)

Abstract not available for NZ259493

Abstract of corresponding document: **US5862639**

An earthquake, fire and wind resistant pre-fabricated building panel comprises a plurality of frame members. The frame members are connected together to form a frame lying in a frame plane, the frame defining a perimeter of the panel, the perimeter bounding an interior portion of the panel. At least some of the frame members are biased inwardly, generally in the frame plane, towards the interior portion of the panel. A first solidified castable substance is cast in the interior portion of the frame, between the frame members. A three-dimensional structure such as a house is formed by connecting the panels together. The connections absorb and distribute seismic forces to the entire three-dimensional structure and the biased frame members act to absorb residual seismic forces reaching the individual panels. The castable substance and biased frame members permit the panel to withstand both positive and negative loading and render the panel fire resistant.

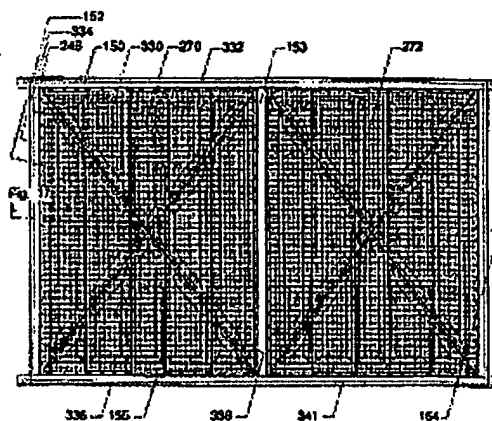

Data supplied from the esp@cenet database - Worldwide